

## Overview

The Roda Deaco RB4A range is a compact butterfly design air intake shutoff valve available with electrical or mechanical actuation. Actuation of the RB4A solenoid rapidly closes the valve's sealing element which shuts off intake air flow into the engine.

The RB4A can be used in fully automatic or manual shutdown systems. When incorporating into an automatic overspeed shutdown system, this valve is compatible with the Revguard 2 Speed Switch.

We offer custom configurations to fit your specific applications. Our valves are tested to strict OEM standards for shock, corrosion, vibration and life cycle.

The compact butterfly design is also available in 2" and 3". Additionally, we offer custom configurations to fit your specific applications, with a variety of different types of valves ranging in size from 1" to 14".

Please contact our customer service department to discuss your requirements.

## Trusted Industry Experts


We are the leading provider of air intake shutoff valves and systems with manufacturing facilities in Canada, England and the United States to serve our global markets. Our success is driven by our people and their commitment to exceed customer expectations. We will help you find the right protection system for your diesel engine application.



## Features and Benefits

- Easy to install and maintain
- Lightweight, compact design
- Corrosion resistant aluminum construction
- Heavy duty stainless steel linkage
- Custom engineered o-ring design on outer perimeter of disc for positive seal

## Dimensions

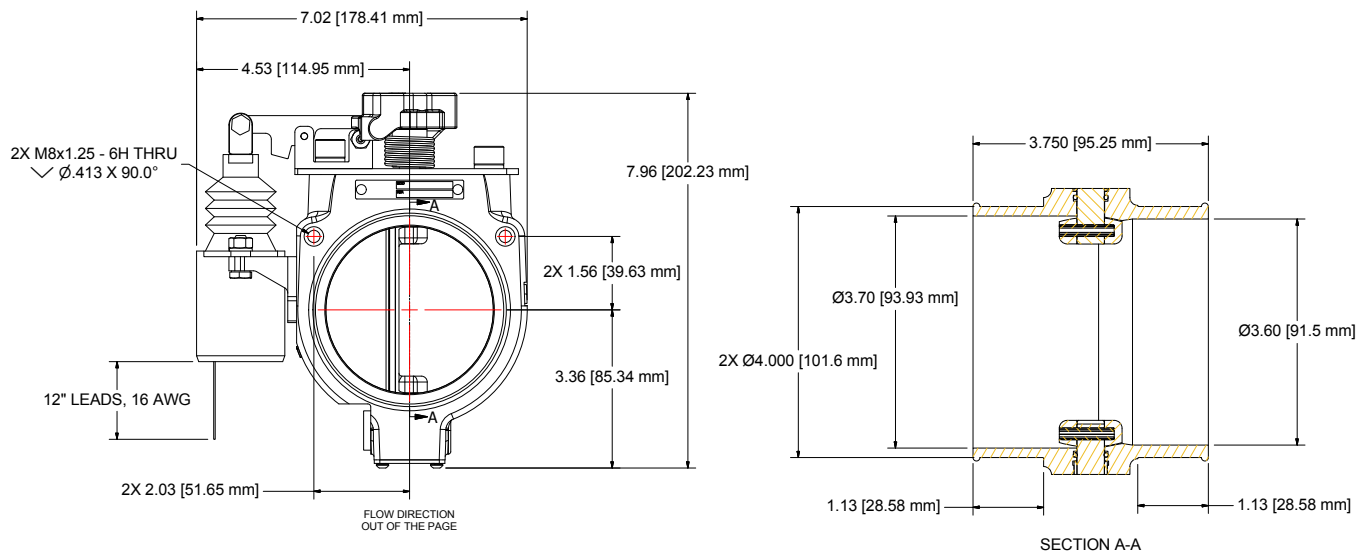

## Specifications

<b>Standard materials</b>	Valve body	Aluminum
	Sealing element	Aluminum disc/Viton seal
	Seals	Viton/Silicone
	Actuator assembly	Stainless steel/aluminum
<b>Net weights</b> (including actuator)	Standard solenoid actuated	5.5 lbs (2.5 kg)
<b>Intake air temp range</b>	Standard valve	-40°F to 257°F (-40°C to 125°C)
<b>Ambient air temp range</b>	Standard valve	-40°F to 257°F (-40°C to 125°C)
<b>Electric solenoid actuation</b> (standard solenoid)	Nominal 12 VDC power requirement	48 amp pull in
	Cycle rate	4 activations per minute

### Americas

AMOT - USA  
Tel +1 (281) 469 3377  
Fax +1 (713) 559 9419  
info@rodadeaco.com

Roda Deaco - Canada  
Tel +1 (780) 465 4429  
Fax +1 (780) 469 6275  
info@rodadeaco.com

### Asia Pacific

AMOT - China  
Tel +86 21 6279 7700  
Fax +86 21 5237 8560  
shanghai@amot.com

AMOT - Singapore  
Tel +65 6408 6265  
Fax +65 6293 3307  
singapore@amot.com

### Europe, Middle East and Africa

AMOT - England  
Tel +44 (0) 1284 762222  
Fax +44 (0) 1284 760256  
info@amot.com

AMOT - Germany  
Tel +49 (0) 40 8537 1298  
Fax +49 (0) 40 8537 1331  
germany@amot.com